





HLC-84M/ Inalambrica

Principales Funciones

- MPEG-4/MJPEG Formato de compresion
- Audio Bidireccional
- Soporte vista remota via celular 3G
- Dual Streaming
- Incluye software de monitoreo hasta 36 camaras
- Inalambrica



Interface

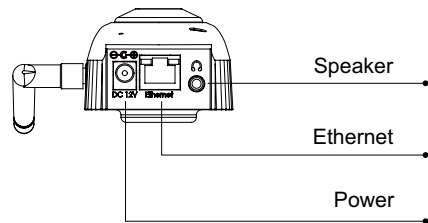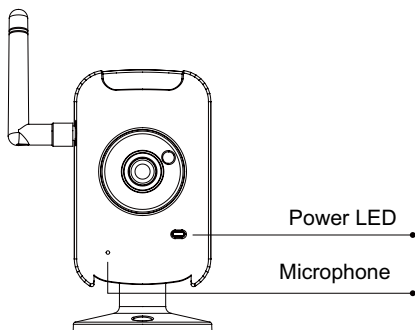

Unit: mm

Specifications

Hardware	
CPU	ARM 9, 32 bit RISC
RAM	64MB
Flash	8MB
Image Sensor	1/4" CMOS
Sensitivity	1.5 lux @ F2.0
Lens Type	4.0 mm, F 2.0
Microphone	Built-in
Audio Out	1 (3.5 mm Phone Jack)
Power Consumption	LAN: DC 12V, 200A WLAN: DC 12V, 250A
Operating Temperature	0°C~40°C
Dimensions	59 (mm)x93.7 (mm)x45.5 (mm)
Weight	180g
Network	
Ethernet	10/ 100 Base-T
Network Protocol	HTTP, TCP/ IP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, 3GPP, UPnP
Wireless (Optional)	
Wireless	802.11 b/g
Security	WEP,WPA-PSK,WPA2-PSK

System	
Video Resolution	1280x1024,640x480, 320x240, 160x120
Video Adjust	Brightness, Contrast, Exposure, Sharpness, AGC, Night Mode
Dual Streaming	Yes
Image Snapshot	Yes
Full Screen Monitoring	Yes
Compression Format	MPEG-4, MJPEG
Video Bitrate Adjust	CBR, VBR
Motion Detection	Yes, 3 different areas
Triggered Action	Mail, FTP
Pre/ Post Alarm	Yes, configurable
Security	Password protection
Firmware Upgrade	HTTP mode, can be upgraded remotely
Simultaneous Connection	Up to 10
Audio	Yes, 2-way (Duplex Support)

Client system requirements

OS	Windows 2000/2003, XP, Vista, IE 6 or above
Hardware	
Suggested	Intel-C 2.8G, RAM: 512MB, Graphic card: 64MB
Minimum	Intel-C 1.6G, RAM: 256MB, Graphic card: 32MB

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE